


GENERAL NOTES:

1. Manhole is manufactured I.A.W. ASTM C-478.
F'c= 4500 psi @ 28 days.
2. Dimensions to meet field requirements
and project elevations.
3. Reinforcing per ASTM A-185
4. Ladder rungs are steel reinforced, polypropylene
coated type ML-10.
5. Manhole joints to be sealed using CS-102
Butyl Sealant or mortar.
6. Pipe to manhole seal to be mortared by contractor.

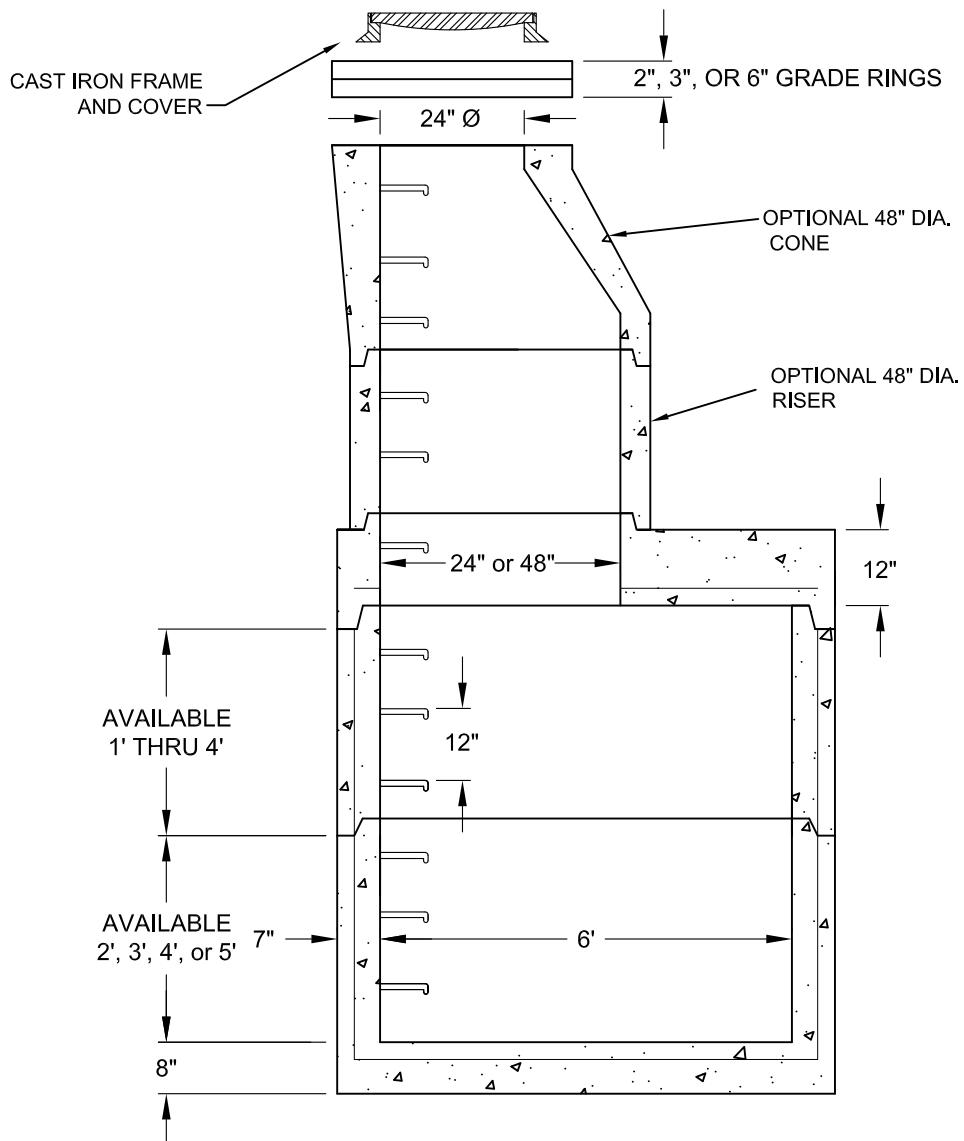

1-800-638-6884
www.gillespieprecast.com

72"Ø Storm Manhole

DRAWN BY:

J.T.

DWG.:

1 of 1

SCALE:

Not to Scale

DATE:

12-20-02